

Survey on Evaluating The Sampling For Intrusion Detection System Using Machine Learning Technique

Soumya Tiwari (M-tech Research Scholar)¹, Nitesh Gupta (Assistant Professor)², Dr. Umesh K Lilhore(Dean PG)³

^{1,2,3}(Department Of Computer Science & Engineering, NRI Institute Of Information Science and Technology, Bhopal)

Abstract:

Rapid development and popularization of information system, network security is a main important issue. Intrusion Detection System (IDS) as the main security defensive technique and is widely used against intrusion. Data Mining and Machine Learning techniques proved useful attention in security research area. Recently, many machine learning methods have also been applied by researchers, to obtain highly detection rate. Problem of all those methods is that how to classify attack or intrusion effectively. Looking at such inadequacies, the machine learning technique is used for obtain the high detection rate. Also, internet usage is increasing progressively, so that large amount of data and its security has become an important issue. Sampling technique can be an efficient solution for large dataset. Sampling technique can be applied for obtaining the sampled data. Sampled dataset represent the whole dataset with proper class balancing. Class imbalanced can be balanced by sampling techniques. The purpose of this paper is to propose classification framework based on different model. This model also based on machine learning and sampling technique to improve the classification performance.

Keywords - Sampling, Classification, Machine learning technique, IDS.

I. INTRODUCTION

We secure information either in private or government sector as it has become an essential requirement. System vulnerabilities and valuable information magnetize most attackers' attention. Traditional approaches that are used for intrusion detection, such as firewalls or encryption are not sufficient to prevent system from all attack types. Subsequently the number of attacks through network and other medium has been increased radically in recent years. Thus efficient intrusion detection is required as a security layer against these malicious or suspicious and abnormal activities. Thus, intrusion detection system (IDS) has been introduced as a security technique to detect various attacks. IDS can be identified by two techniques, namely misuse detection and anomaly detection. Misuse detection techniques can detect known attacks by examining attack patterns, much like virus detection by an antivirus application.

However they cannot detect unknown attacks and need to update their attack pattern signature whenever there is new attacks. On the other hand, anomaly detection identifies any unusual activity pattern which deviates from the normal usage as intrusion. Although anomaly detection has the capability to detect unknown attacks which cannot be addressed by misuse detection, it suffers from high false alarm rate. In recent years, an interest was given into machine learning techniques to overcome the constraint of traditional intrusion techniques by increasing accuracy and detection rates. New machine learning based IDS with sampling is used in our detection approach. The advantage of IDS (Intrusion Detection system) can greatly reduce the time for system administrators/users to analyse large data and protect the system from illicit attacks. Improve the performance of IDS and the low false alarm rate.

II. MACHINE LEARNING TECHNIQUE

When a computer is required to perform an specific task, a programmer's solution is to write a computer program in order to perform the task. A computer program is a piece of code that instructs the computer which actions in order to perform the task. The field of machine learning deals with the higher-level question of how to develop computer programs that can automatically learn with experience.

A computer program is said to learn from experience E with respect to some class of tasks T and performance measure P , if its performance at tasks in T , as measured by P , improves with experience E . Thus, machine learning algorithms automatically extract knowledge from machine readable information. In machine learning, computer algorithms (learners) attempt to automatically extract knowledge from example data. This knowledge can be used to make predictions about novel data in the future and to provide insight into the nature of the target concepts applied to the research at hand, this means that a computer would learn to classify alerts into incidents and non-incidents (task T). A possible performance measure (P) for this task would be the Accuracy with which the machine learning program would classify the instances correctly. The training experiences (E) could be labelled instances.

III. RELATED WORK

The authors [1] have proposed to use data mining technique that includes classification tree and support vector machines for intrusion detection. Utilize data mining for solving the problem of intrusion because of following reasons: It can process large amount of data. User's subjective evolution is not necessary, and it is more suitable to discover the ignored and unknown information. Machine learning based ID3 and C4.5 two common classification tree algorithms used in data mining. Author said C4.5 algorithm is better than SVM in detecting network intrusions and false alarm rate in KDD CUP 99 dataset.

In [2], the author said performance of a Machine Learning algorithm called Decision Tree is

evaluated and compared with two other Machine Learning algorithms namely Neural Network and Support Vector Machines which has been conducted by A. The algorithms were tested based on accuracy, detection rate, false alarm rate and accuracy of four categories of attacks. From the experiments conducted, it was found that the Decision tree algorithm outperformed the other two algorithms. Compare the efficiency of Neural Networks, Support Vector Machines and Decision Tree algorithms against KDD-cup dataset.

In [3], the authors have proposed supervised learning with pre-processing step for intrusion detection. Authors used the stratified weighted sampling techniques to generate the samples from original dataset. These sampled applied on the proposed algorithm, proposed method used the stratified sampling and decision tree. The accuracy of proposed model is compared with existing results in order to verify the validity and accuracy of the proposed model. The results showed that the proposed approach can provide better and robust representation of data. The experiments and evaluations of the proposed intrusion detection system are performed with the KDD Cup 99 dataset. The experimental results show that the proposed system can achieve higher Accuracy and Low Error in identifying if the records are normal or attacked one.

In [4] authors said today's era data and information security is most important. The Intrusion detection system deals with large amount of data which contains various irrelevant and redundant features resulting in increased processing time and low detection rate. Therefore feature selection plays a vital role in intrusion detection. There is various feature selection methods used. Author's compared the different feature selection methods are presented on KDDCUP'99 dataset and their performance are evaluated in terms of detection rate. There are total 41 network traffic features, used for intrusion detection, out of which some features will be potential in detecting intrusions. Therefore the predominant features are extracted from the 41 features that are really effective in detecting intrusions. Feature selection

can reduce the computation time and model complexity.

In [5] authors said Data sets contain very large amount of data which is not an easy task for the user to scan the entire data set. Sampling has often been suggested as an effective tool in order to reduce the size of the dataset operated at some cost to accuracy. It is the process of selecting representatives which indicates the complete data set by examining a fraction. This paper emphasises on different types of sampling strategies applied on neural network. Here sampling technique has been applied on two real, integers and categorical dataset such as yeast and hepatitis data set prior to classification. Authors give the comparison of different sampling strategies for classification which gives more accuracy.

In [6] authors investigate the effect of sampling methods on the performance of quantitative bankruptcy prediction models on real highly imbalanced dataset. Seven sampling methods and five quantitative models are tested on two real highly imbalanced datasets. A comparison of model performance tested on random paired sample set and real imbalanced sample set is also conducted. The commonly used re-sampling strategies include oversampling and under-sampling. Two widely used oversampling methods: Random Oversampling with Replication (ROWR) and Synthetic Minority Over-sampling Technique (SMOTE) are employed in this paper. Two Under-sampling sampling method: Random under sampling (RU) and Under-sampling Based on Clustering from Gaussian Mixture Distribution (UBOCFGMD). Under-sampling method is better than oversampling method because there is no significant difference on performance but oversampling method consumes more computational time. The work [7] discusses imbalanced dataset. A dataset is imbalanced if the classification categories are not approximately equally represented. Authors discuss some of the sampling techniques used for balancing the datasets, and the performance measures more appropriate for mining imbalanced datasets. Over and under-sampling methodologies have received significant

attention to counter the effect of imbalanced data sets. Sampling methods are very popular in balancing the class distribution before learning a classifier.

IV. DATA SET AND SAMPLING

A. KDD Cup 99 Dataset:

Used in the evaluate machine learning technique. In practice, we recognize that this dataset is decade old and has many criticisms for Current research. But we believe that it is still sufficient for our experiment which aims to reflect the performance of distinct machine learning approaches in a general way and find out relevant issues. In addition, the full KDD99 dataset Contain 4,898,431 records and each record contain 41 features.

Due to the computing power, we do not use the full dataset of KDD99 in the experiment but a 10% portion use of it. This 10% KDD99 dataset contains 494,021 records (each with 41 features) and 4 categories of attacks. The details of attack categories and specific types are shown in Table1. According to Table1, there are four attack categories in 10% KDD99 dataset:

- (1) Probing: Scan networks to gather deeper information
- (2) DoS: Denial of service
- (3) U2R: Illegal access to gain super user privileges
- (4) R2L: Illegal access from a remote machine.

The number of samples of various types in the training set and the test set are listed respectively in tables below:

TABLE I
KDD CUP 99 DATASET DESCRIPTION

Normal	Attack				Total
	DoS	U2R	R2L	PROBE	
97278	391458	52	1126	4107	494021
	396743				

B. Feature Selection

Due to the ample of data flowing over the network, real time intrusion detection is nearly

impossible. Computation time and model complexity can be reduced by feature selection to a great extent. Research on feature selection had been started in early 60s [9]. Basically feature selection is a technique that is used to select a subset of relevant/important features by removing most irrelevant and redundant features [10] from the data in order to build an effective and efficient learning model. A number of feature selection algorithms have been proposed by various authors. Attribute evaluator is basically used for ranking all the features according to some metric. Various attribute evaluators are available in WEKA.

C. Sampling

Data sets contain very large amount of data which is not an easy task for the user to scan the entire data set. The researcher’s initial task is to formulate a rational justification for the use of sampling in his research. Sampling has often been suggested as powerful tool in order to reduce the size of the dataset operated at some cost to accuracy. It is the process of selecting representatives which indicates the complete data set by examining a fraction. Due to sampling we can overcome the problems like; i) in research it is practically impossible to collect and test each and every element from the data base individually; and ii) study of sample instead of entire dataset is also sometimes likely to produce more reliable results.

Some research in machine learning community has addressed the strategy of re-sampling the original dataset to deal with the issue of class imbalance. The commonly used re-sampling strategies include oversampling and under-sampling. Oversampling is to sample the minority class over and over to achieve the balanced distribution of the two classes, while under-sampling is to select a portion of the majority class to achieve the distribution balance of the two classes.

- 1) **Under sampling:** Under sampling is to select apportion of the majority class to achieve the distribution balance of the two classes. In Random under sampling the majority class is under-sampled by randomly removing samples from the majority

class Population until the minority class becomes some specified percentage of the majority class.

- 2) **Over sampling by SMOTE:** Oversampling is to sample the minority class over and over to achieve the balanced distribution of the two classes. By applying a combination of under-sampling and over-sampling, the initial bias of the learner towards the negative (majority) class is reversed in the favor of the positive (minority) class. Classifiers are learned on the dataset perturbed by “SMOTING” the minority class and under-sampling the majority class.

V. ARCHITECTURE OF THE PROPOSED WORK

In Architecture of the system shows that in 10% portion of KDD99 dataset. Firstly we are applying sampling technique and get balanced sampled dataset now we are using pre-processing technique in sampled dataset and applying feature selection method. Now going to classification part and determine the training and testing data in very short period after that applying classification technique in trained data and evaluate the result.

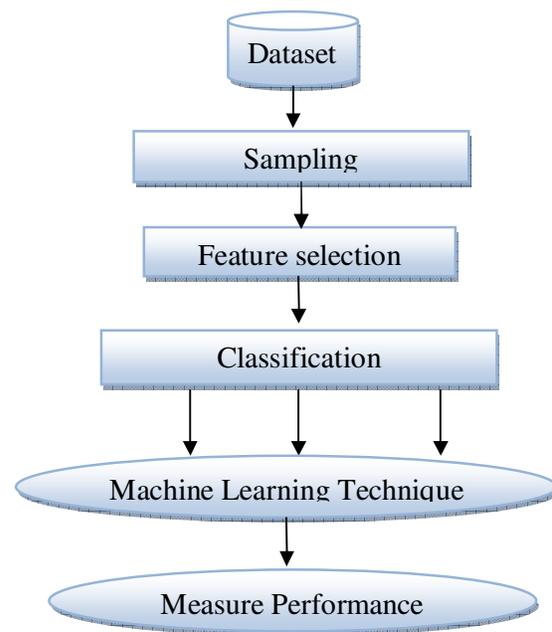


Fig 1 .Architecture of the system

Balanced sampled KDD’99 dataset, obtain from sampling technique. Result shows the performance

of the proposed approach classifier in terms of accuracy and error rate on sampled KDD, 99 dataset. Result also shows comparison of performance of the different machine learning classifier in terms of the detection rate and false alarm rate.

Following fundamental definition and formulas are used to estimate the performance of the classifier: accuracy rate (AR) and Error Rate (ER).

True Positive: When, the number of found instances for attacks is actually attacks.

False Positive: When, the number of found instances for attacks is normal.

True Negative: When, the number of found instances is normal data and it is actually normal.

False Negative: When, the number of found instances is detected as normal data but it is actually attack.

The accuracy of IDS classifier is measured generally on basis of following parameters:

Detection Rate: Detection rate refers to the percentage of detected Attack among all attack data, and is defined as follows:

$$\text{Detection rate} = \frac{TP}{(TP+TN)} * 100$$

With this formula detection rate for different types of Attacks can be calculated.

False Alarm rate: False alarm rate refers to the percentage of normal data which is wrongly recognized as attack. , and is defined as follows:

$$\text{FALSE ALARM RATE} = \frac{FP}{(FP+TN)} * 100$$

VI. CONCLUSION

In this paper, Machine Learning and sampling technique is evaluated for the intrusion detection system. The purpose of this work is proposed method for efficiently classify abnormal and normal data by using very large data set and detect intrusions even in large datasets with short training and testing times. Most importantly when using this method redundant information, complexity

with abnormal behaviors are reduced. With proposed method we get high accuracy for many categories of attacks and detection rate with low false alarm. The proposed method results can compare with other machine learning technique using intrusion detection to improve the performance of intrusion detection system.

VII. REFERENCES

- [1] YU-XIN MENG “The Practice on Using Machine Learning For Network Anomaly Intrusion Detection” 2011 IEEE
- [2] Chi Cheng, Wee Peng Tay and Guang-Bin Huang “Extreme Learning Machines for Intrusion Detection” - WCCI 2012 IEEE World Congress on Computational Intelligence June, 10-15, 2012 - Brisbane, Australia
- [3] Naeem Seliya , Taghi M. Khoshgoftaar “Active Learning with Neural Networks for Intrusion Detection” IEEE IRI 2010, August 4-6, 2010, Las Vegas, Nevada, USA 978-1-4244-8099-9/10/\$26.00 ©2010 IEEE
- [4] Kamarularifin AbdJalill, Mohamad Noorman Masrek “Comparison of Machine Learning Algorithms Performance in Detecting Network Intrusion” 2010 International Conference on Networking and Information Technology 978-1-4244-7578-0/\$26.00 © 2010 IEEE
- [5] Shingo Mabu, Member, IEEE, Ci Chen, Nannan Lu, Kaoru Shimada, and Kotaro Hirasawa, Member, IEEE “An Intrusion-Detection Model Based on Fuzzy Class-Association-Rule Mining Using Genetic Network Programming” IEEE, JANUARY 2011
- [6] Liu Hui, CAO Yonghui “Research Intrusion Detection Techniques from the Perspective of Machine Learning” - 2010 Second International Conference on MultiMedia and Information Technology 978-0-7695-4008-5/10 \$26.00 © 2010 IEEE
- [7] Jingbo Yuan , Haixiao Li, Shunli Ding , Limin Cao “Intrusion Detection Model based on Improved Support Vector Machine” Third International Symposium on Intelligent Information Technology and Security

Informatics 978-0-7695-4020-7/10 \$26.00 ©
2010 IEEE

- [8] Maria Muntean, HonoriuVălean, LiviuMiclea, Arpad Incze “A Novel Intrusion Detection Method Based on Support Vector Machines” IEEE 2010.
- [9] W. Yassin, Z. Muda, M.N. Sulaiman, N.I.Udzir, “Intrusion Detection based on K-Means Clustering and OneR Classification” IEEE 2011.
- [10] MohammadrezaEktefa, Sara Memar, Fatimah Sidi, Lilly SurianiAffendey “Intrusion Detection Using Data Mining Techniques” IEEE 2010.